

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 32 TOWNSHIP 15 RANGE 4

DATE: -5-14-04 05-27-08

PARTY CHIEF: Wilcoxon

CREW: Set Harrison

TYPE OF MARKER: Mag-nail over brass

METHOD OF ESTABLISHMENT: plug in steel box



County: 11-24-99

IN. S.P.C. E ZONE NAD '83

NAME: 15043207

N: 493617.0380(m)

E: 61091.9450(m)

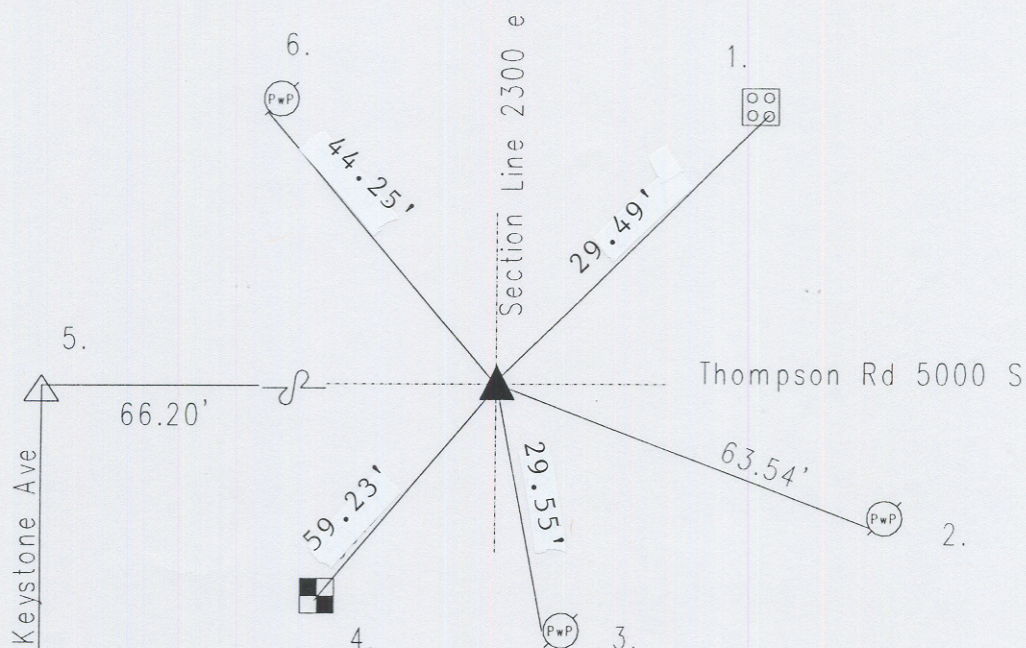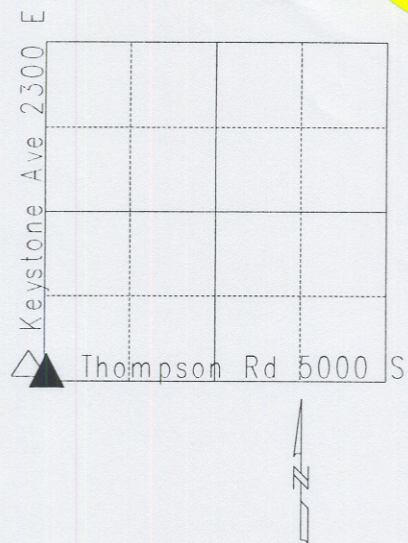

15043207

REF.	DISTANCE	DESCRIPTION
1.	29.49'	Cut 'x' SE bolt of aluminum pole base
2.	63.54'	Road nail SW PwP#9-700 B 12"up
3.	29.55'	Mag nail w/brass washer W guide pole 6"up
4.	59.23'	Center of Marion County TBM
5.	66.20'	Due W to NW cor. 5-14-4 (brass plug in steel box)
6.	44.25'	PK nail W PwP#10-700 4"up

15043207 SW corner (double corner) 66.20' between corners

CORNER HISTORY: Corner originally set as a post in 1820 by John Hendricks with witness: 14" beech S 66 E 18 links; 18" dogwood N 63 W 11 links per Marion County Atlas pg. 10. A survey 5-21&22-1860 by R. Mayhew called corner stone by old witness stumps found called new witness: 15" beech S 41 W 42 links; 22" beech S 39 E 62 links per Perry Township Legal Survey Book pg. 36. Same page dated 2-28 & 3-1&2-1867 by Wm. P. Smith called found a stone. Reference dated 5-21-1970 by SeFranka called re-set PK nail. Reference dated 2-15-1961 by Monroe called road nail found. Reference dated 10-7-1974 by Fortner called found pk nail at surface. Reference dated 3-21-78 by Wilcoxon called brass plug in steel box found. Reference dated 1988 by Greene called same. Reference dated 6-2-1993 by Whiteside called same. Reference dated 11-24-99 by Wilcoxon called same. Reference dated 5-27-08 by Wilcoxon called found brass plug in steel box 3" down; because of re-surfacing set Harrison where the brass plug had been, no other points were recovered.